


HT PM-X 高硬度鋼用粉末高速鋼直槽絲錐

Straight Flute Taps for Hardened Steels(~50HRC)

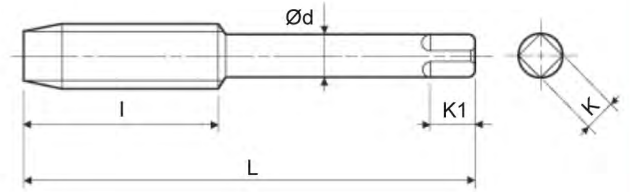


* 適於加工32~50HRC之高硬度鋼材，如合金鋼、模具鋼、工具鋼。
* 採用X鍍膜，可大幅提升耐磨耗性、加工性能及使用壽命。

單位：mm

規格	精度 Tap Limits	全長 (L)	牙長 (l)	柄徑 (d)	四角部寬 (K)	四角部長 (K1)	價(支)格
" 4 x 0.7	FH3	52	13	5	4	7	415.00
" 5 x 0.8	FH3	60	16	5.5	4.5	7	430.00
" 6 x 1.0	FH3	62	19	6	4.5	7	445.00
M 8 x 1.0	FH3	70	22	6.2	5	8	585.00
" 8 x 1.25	FH3	70	22	6.2	5	8	585.00
" 10 x 1.0	FH3	75	24	7	5.5	8	740.00
" 10 x 1.25	FH3	75	24	7	5.5	8	740.00
M 10 x 1.5	FH3	75	24	7	5.5	8	740.00
" 12 x 1.25	FH4	82	29	8.5	6.5	9	1,035.00
" 12 x 1.5	FH3	82	29	8.5	6.5	9	1,035.00
" 12 x 1.75	FH3	82	29	8.5	6.5	9	1,035.00

PT PM-X 高硬度鋼用粉末高速鋼斜牙管牙絲錐

Taper Pipe Taps for Hardened Steels(~50HRC)

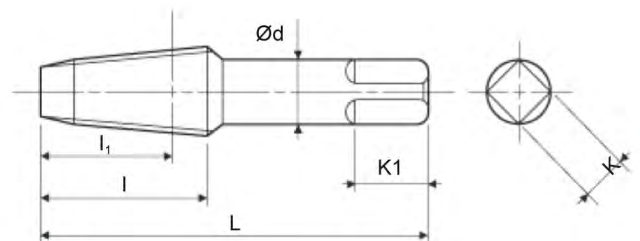

* 適於加工32~50HRC之高硬度鋼材，如合金鋼、模具鋼、工具鋼。
* 採用X鍍膜，可大幅提升耐磨耗性、加工性能及使用壽命。

單位：mm

規格	精度 Tap Limits	全長 (L)	牙長 (l)	柄徑 (d)	四角部寬 (K)	四角部長 (K1)	價(支)格
" 1/4 - 19	JIS II	67	28	11	9	12	1,495.00
" 3/8 - 19	JIS II	75	28	14	11	14	2,045.00
" 1/2 - 14	JIS II	87	35	18	14	17	2,535.00
" 3/4 - 14	JIS II	96	35	23	17	20	4,285.00
" 1" - 11	JIS II	109	45	26	21	24	7,025.00