




# CSMC2C - 3C

全鎢鋼超硬斜面倒角刀

2&3 Flute Solid Carbide Chamfer Cutters with ATN Coating

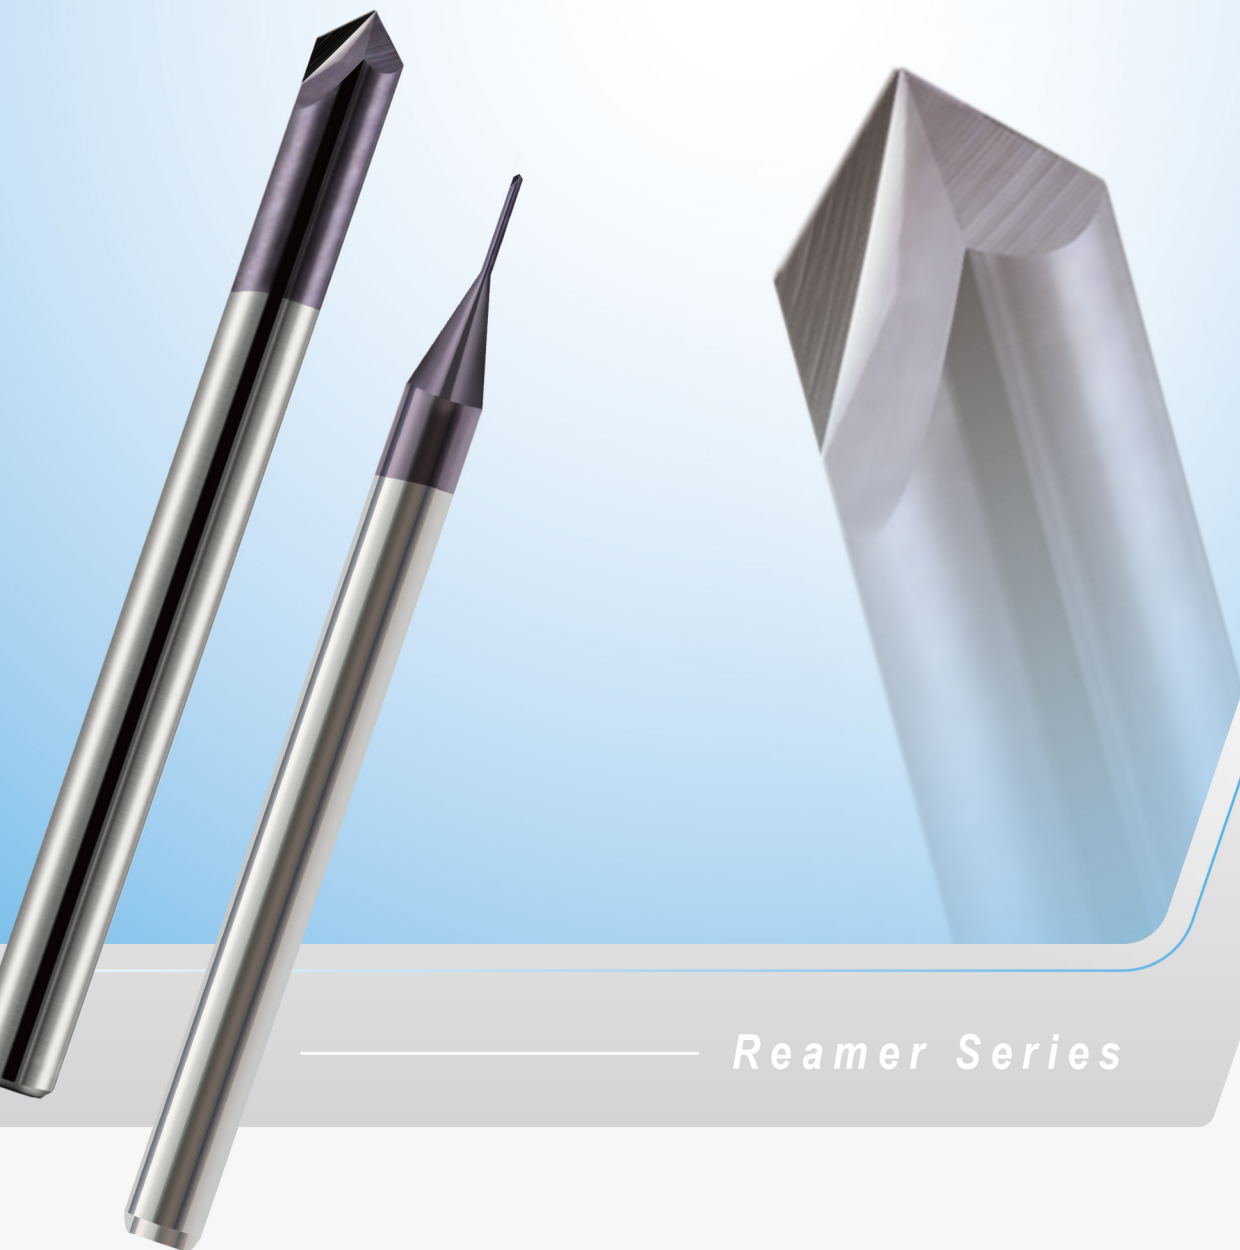

Reamer Series

# CSMC2C · 3C




## 全鎢鋼超硬斜面倒角刀


2&3 Flute Solid Carbide Chamfer Cutters with ATN Coating



形式 I (2刃)

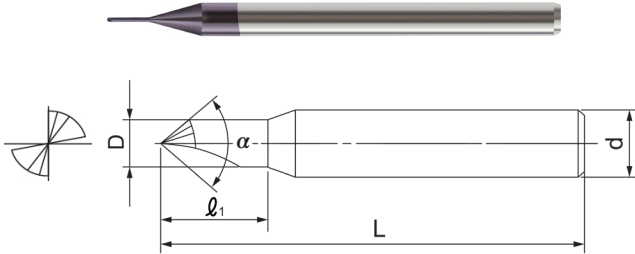

形式 II (2刃)

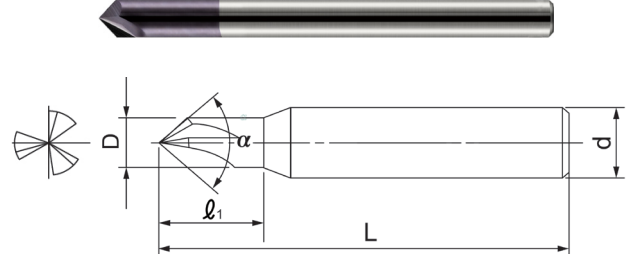

單位：mm

刃徑 (D)	倒角度 ( $\alpha^\circ$ )	有效長 ( $l_1$ )	柄徑 (d)	全長 (L)	刃數 (N)	形式 Type
0.3	90°	1	4	50	2	I
0.5	90°	1.5	4	50	2	I
1	90°	3	4	50	2	I
1.5	90°	4	4	50	2	I
2	90°	6	4	50	2	I
2.5	90°	7.5	4	50	2	I
3	90°	9	4	50	2	I
4	90°	—	4	50	2	II
1	90°	3	4	50	3	I
1.5	90°	4	4	50	3	I
2	90°	6	4	50	3	I
2.5	90°	7.5	4	50	3	I
3	90°	9	4	50	3	I
4	90°	—	4	50	3	II

# CSMC2C · 3C

## 切削條件參考表 Recommended Cutting Condition

被削材	不銹鋼		鋼件	
	回轉數 $\text{min}^{-1}$	進刀速度 $\text{mm/min}$	回轉數 $\text{min}^{-1}$	進刀速度 $\text{mm/min}$
1	32,000	450	32,000	550
1.5	32,000	500	32,000	600
2	25,000	500	25,000	600
3	20,000	600	20,000	700
4	15,000	700	15,000	800

索引

攻牙工具

絞刀

沉頭銼刀、鑽頭

斜面倒角刀

溝槽刀具

鑽頭